

1 2 3 4 5 6

A

A




B

B

C

C

D

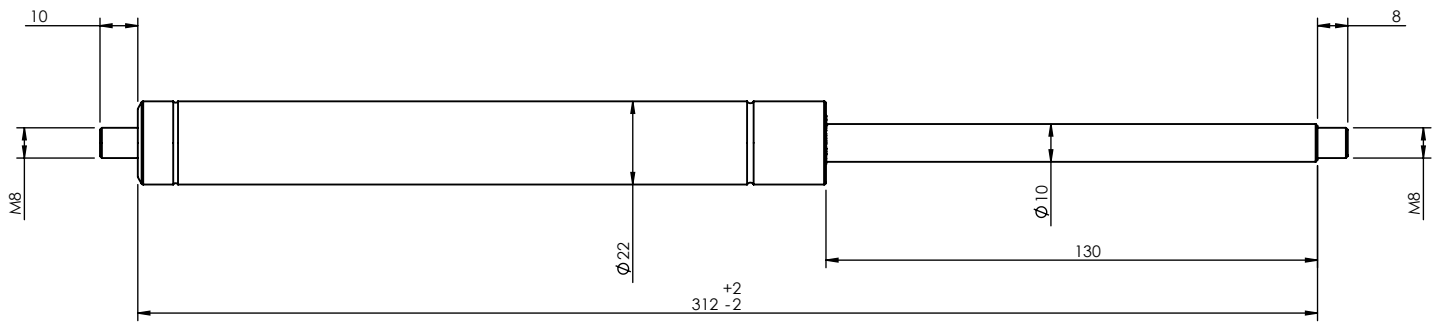

Laserprint code: - 30430003N

Unless otherwise specified: All dimensions are in millimeters & include chem. applied/plated finish. Remove Burrs & sharp edges.



Brimotech Solutions BV  
Artemisweg 105C 8239DD Lelystad  
T: +31 (0)320 769103 F: +31 (0)84 8317577  
The Netherlands

Info@brimotech.nl  
www.brimotech.nl

CONFIDENTIAL: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIMOTECH SOLUTIONS BY HOLLAND


Part number: **30430003**  
Description: Gas spring stroke 130mm

Tolerance according to NEN-ISO 406  
Roughness according to NEN 3634  
Shape tolerance according to NEN-ISO 1101

Add. info: Viton seal / Valve  
Material: Stainless steel 316  
Finish: Eelctr. Polished  
Configuration: **Open force [100N-1200N]**  
Weight: 235.54 Gram  
Drawing: 30430003 **F1 Force: ....N**  
Project no:  
Revision:

Date last saved: 28-5-2020  
Date created: 1-5-2012  
DXF/STEP available on request  
Scale: 1:2

Nominal size (mm)	dim variation (mm)
0 - 25	±0.10
25 - 50	±0.12
50 - 75	±0.15
75 - 100	±0.18
100 - 150	±0.20
150 - 200	±0.25
200 - 250	±0.30



General tolerance on gas springs and dampers is 2mm

1 2 3