

1 2 3 4 5 6

A

A



B

B


C

C

D

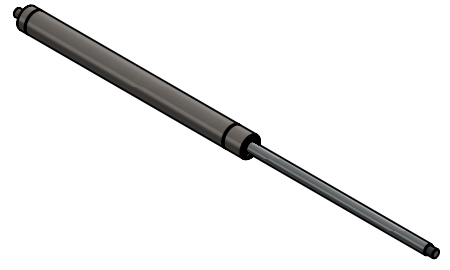

Valve

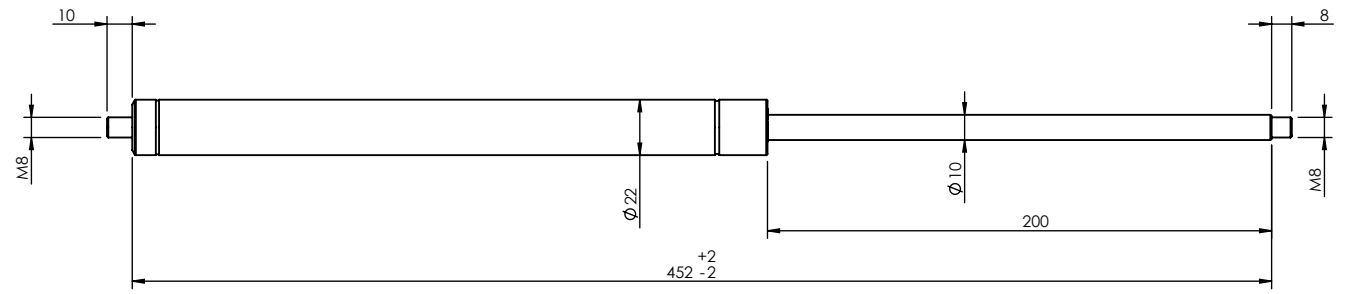

Laserprint code: - 30430007N

Unless otherwise specified: All dimensions are in millimeters & include chem. applied/plated finish. Remove Burrs & sharp edges.

Brimotech
solutions

Brimotech Solutions BV
Artemisweg 105C 8239DD Lelystad
T: +31 (0)320 769103 F: +31 (0)84 8317577
The Netherlands

Info@brimotech.nl
www.brimotech.nl

CONFIDENTIAL: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE CONFIDENTIAL AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIMOTECH SOLUTIONS BY HOLLAND

Part number: **30430007**


Description: Gas spring stroke 200mm

Tolerance according to NEN-ISO 406
Roughness according to NEN 3634
Shape tolerance according to NEN-ISO 1101

Add. info: Viton seal / Valve
Material: Stainless steel 316
Finish: Eelctr. Polished
Configuration: **Open force [100N-1200N]**
Weight: 333.95 Gram
Drawing: 30430007 **F1 Force:N**
Project no:
Revision:

Date last saved: 10-9-2021
Date created: 1-5-2012

Nominal size (mm)	dim variation (mm)
0 - 3	±0.05
3 - 6	±0.06
6 - 10	±0.08
10 - 15	±0.10
15 - 20	±0.12
20 - 30	±0.15
30 - 50	±0.20
50 - 70	±0.25
70 - 100	±0.30
100 - 150	±0.40
150 - 200	±0.50



General tolerance on gas springs and dampers is 2mm

DXF/STEP available on request
Scale: 1:3
Size **A4**
Drawn by: M. Brokkaar